
## **TMPK135-A**

June 2020



## **Product Overview:**

**TMPK135-A** is a mixture of carbide particles and nickel-based matrix specifically designed for HVOF systems. It produces strong corrosion and abrasion resistance coatings that maintain hardness at temperatures up to 870 °C (1598°F). It has proven to be ideal for extreme erosive and abrasive environments.

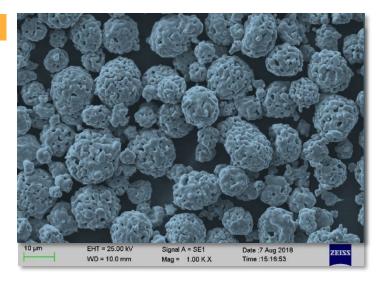

Alloy	Cr	С	Ni
ТМРК135-А	Balance	7.0 – 12.0	15.0 – 20.0
Chemical Name:	Chromium-Carbon-Nickel (75Cr <sub>3</sub> C <sub>2</sub> -25NiCr)		
Powder Morphology:	Spherical		
Manufacturing Method:	Agglomerated and Sintered		
Apparent Density:	2.0 – 3.0 g/cm <sup>3</sup>		

Particle Size Distribution:				
+53 μm	-53 μm / +45 μm	-45 μm / +15 μm	-15 μm	
< 1.0%	< 5.0%	Balance	< 5.0%	

Application:	Standard Sizes & Packaging:

Turbine air seal rings

Particle Size

Packaging

Turbine exhaust valve seats

-53/+10 microns

5kg/bottle

Turbine struts